



Symbol LS3408ER

Extended range rugged scanner



FEATURES

Flexible working range:
4 in./10 cm to 48 ft./14.6 m
Improves user productivity

Ergonomic, rugged industrial design withstands multiple 6.5-ft./2 m drops to concrete; 2,500 3-ft./1 m tumbles (5,000 hits)
Ensures maximum reliability with less down time due to accidental drops

IP65 sealing rating (electronic enclosure)
Protects against water and dust to ensure reliable performance in rough conditions

Bright 650nm laser aiming dot
Delivers clearly visible line for more accurate scanning

Dual-scan angle switches from standard to wide under software control
Offers fast, accurate bar code reading on menus and pick lists

Redefining performance for maximum industrial mobility

The rugged Symbol LS3408ER handheld scanner from Motorola delivers superior performance and versatility for your scan-intensive industrial applications. In the yard, warehouse, distribution center, manufacturing plant or retail store, the Symbol LS3408ER handheld scanner offers best-in-class performance, excellent reliability and user-friendly ergonomics to create a more productive mobile environment. Multiple on-board interfaces ensure flexible plug and play host connectivity.

Advanced data capture features for industrial-grade applications

The Symbol LS3408ER offers an outstanding reading range, providing the flexibility to enable a wide range of industrial applications. Industry-leading impact tests ensure reliable performance in spite of the inevitable accidental drops. The device is impervious to dust and water, and its exit window is scratch-resistant and recessed

for the highest level of durability. As a result, you avoid unnecessary equipment downtime or expensive equipment replacement costs.

For applications requiring quick access and convenient storage, the Symbol LS3408ER features a built-in metal hook for attachment to a pulley. Two large LED-enhancing windows and an extra loud 80 decibel (db) beeper are strategically placed on the scanner for clear and audible feedback to users.

The smartest way to capture mission-critical information

The extended range Symbol LS3408ER is designed specifically for industrial applications. When you choose the Symbol LS3408ER, you receive the added assurance of purchasing from Motorola — a company with proven advanced data capture capabilities and millions of scanner installations worldwide.

For more information on the Symbol LS3408ER and its full line of accessories, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the web at www.symbol.com/l3408er

SPECIFICATION SHEET

SYMBOL LS3408ER
Extended range rugged scanner

Symbol LS3408ER Specifications

Multiple on-board interfaces

Ensures flexible connectivity, allowing for host "future proofing"

Advanced data formatting (ADF)

Eliminates costly modifications to the host software

Flash memory

Facilitates updates and customization of product in the field

Universal cable set

Allows for easy replacement and/or upgrades

Supports Reduced Space Symbology (RSS®)

Compatible with emerging symbology to leverage your hardware investment

Physical Characteristics

Dimensions:	7.34 in. H x 4.82 in. W x 2.93 in. D 18.65 cm H x 12.25 cm W x 7.43 cm D
Weight (w/o cable):	12.56 oz./356 g
Power Requirements:	4.5 - 14 VDC
Stand-by Current:	50 mA
Power Sources:	Depending on host: • Host power • External power supply
Color:	Twilight Black/Yellow

Performance Characteristics

Scanner Type:	Retrocollective
Light Source:	650 nm visible laser diode
Scan Repetition:	36 scans per second typical
Min. Element Width:	7 mil/0.191 mm
Working Distance:	See Decode Zone
Print Contrast:	25% minimum reflective difference
Roll (Tilt): ¹	± 10° from normal
Pitch: ²	± 65° from normal
Skew (Yaw): ³	± 60° from normal
Decode Capability:	UPC/EAN, UPC/EAN with Supplementals, UCC/EAN 128, JAN 8 & 13, Code 39, Code 39 Full ASCII, Code 39 Trioptic, Code 128, Code 128 Full ASCII, Codabar (NW7), Interleaved 2 of 5, Discrete 2 of 5, Code 93, MSI, Code 11, Code 32, Bookland EAN, IATA, UCC/EAN RSS and RSS variants

Interfaces Supported: RS232, Keyboard Wedge, Wand Emulation, Scanner Emulation, IBM 468X/469X, USB and Synapse

User Environment

Operating Temp.:	-22° to 122° F/-30° to 50° C
Storage Temp.:	-40° to 158° F/-40° to 70° C
Humidity:	5% to 95% relative humidity, non-condensing
Sealing:	Sealed to IP65 specifications
Drop Specifications:	Unit functions normally after repeated 6.5 ft./2 m drops to concrete
Ambient Light Immunity:	Immune to direct exposure of normal office and factory lighting conditions, as well as direct exposure to sunlight; Indoor: 450 ft. candles/4,84 LUX; Outdoor: 4,000 ft. candles/43,040 LUX

Electrostatic Discharge (ESD):	Conforms to 20 kV air discharge and 8 kV of contact discharge
--------------------------------	---

Regulatory

Input Transient Protection:	IEC 1000-4-(2,3,4,5,6,11)
EMI/RFI:	FCC Part 15 Class B, ICES-003 Class B, European Union EMC Directive, Japan VCCI/MITI/Dentori
Laser Safety:	IEC825-1 Class 2


Warranty

The Symbol LS3408ER is warranted against defects in workmanship and materials for a period of 3 years (36 months) from date of shipment, provided that the product remains unmodified and is operated under normal and proper conditions. See full warranty for details.

- 1 - Roll (Tilt): Controlled by rotating the wrist clockwise or counterclockwise
- 2 - Pitch: Controlled by dropping or raising the wrist
- 3 - Skew (Yaw): Controlled by rotating the wrist from left to right or vice versa



LS3408ER Decode Zone

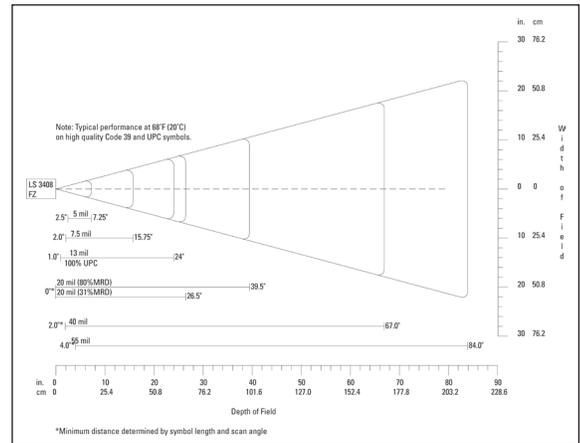

motorola.com

Part number SS-LS3408ER. Printed in USA 05/07. MOTOROLA and the Stylized M Logo and Symbol and the Symbol Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2007 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.



Symbol LS3408FZ

Rugged handheld scanner



FEATURES

High-performance scanner with fuzzy logic decode capability

Premium scanning for all 1D codes including poorly printed, damaged or low contrast bar codes

Ergonomic, rugged industrial design withstands multiple 6.5 ft. (2 m) drops to concrete and 2,500 3 ft. (1 m) tumbles (5,000 hits)

Reduces user fatigue and ensures less down time due to accidental drops

IP65 sealing rating (electronic enclosure)

Protects against water and dust to ensure reliable performance in harsh industrial conditions

Bright LED and beeper with adjustable volume

Multiple modes of confirmation ensure positive user feedback in noisy environments

Reads damaged 1D bar codes for maximum industrial productivity

The rugged Symbol LS3408FZ handheld scanner from Motorola features fuzzy logic technology for fast and accurate reading of damaged, dirty and poorly printed one-dimensional (1D) bar codes typically found in industrial environments. In the yard, warehouse, distribution center, manufacturing plant or retail store, the Symbol LS3408FZ handheld scanner offers superior performance, reliability and user-friendly ergonomics to improve productivity. Multiple on-board interfaces ensure flexible plug-and-play host connectivity.

Advanced data capture technology for tough environments

As innovative as it is rugged, the Symbol LS3408FZ delivers the ergonomic and operational features for scan intensive industrial applications. Industry-leading impact tests ensure reliable performance in spite of the inevitable accidental drops. The device is impervious to dust and water, and its exit window is scratch-resistant and recessed for the highest level of durability. As a result, you avoid

unnecessary equipment downtime or expensive equipment replacement costs. For applications requiring quick access and convenient storage, the Symbol LS3408FZ features a built-in metal hook for attachment to a pulley. Two large LED-enhancing windows and extra loud 80 decibel (db) beeper are strategically placed on the scanner to ensure that decode feedback is clearly visible and audible to users.

Capturing mission-critical information the smart way

The standard range Symbol LS3408FZ is designed specifically for industrial applications. When you choose the Symbol LS3408FZ, you receive the added assurance of purchasing from Motorola — a company with proven advanced data capture capabilities and millions of scanner installations worldwide.

For more information on the rugged Symbol LS3408FZ handheld scanner and the full line of accessories, contact us at +1.800.722.6234 or +1.631.738.2400, or visit us on the web at www.symbol.com/ls3408fz

SPECIFICATION SHEET

SYMBOL LS3408FZ
Rugged handheld scanner

Symbol LS3408FZ Specifications

Bright 650nm laser aiming dot

Delivers clearly visible line for precise, accurate bar code data capture

Supports Reduced Space Symbology (RSS®)

Compatibility with emerging symbologies helps you to leverage your hardware investment

Global Trade Item Number™ (GTIN™) compliant

Decodes and transmits 14-digit GTINs where appropriate

Advanced data formatting

Eliminates costly modifications to the host software

Flash memory

Facilitates updates/customization of product in the field

Universal cable set

Allows for easy replacement and/or upgrades

Multiple onboard interfaces

Ensures flexible connectivity, allowing for host "future proofing"

Hands-free Intellistand™ (optional)

Enables presentation scanning and easy switching between hands-free and handheld modes

Physical Characteristics

Dimensions:	7.34 in. H x 4.82 in. W x 2.93 in. D 18.65 cm H x 12.25 cm W x 7.43 cm D
Weight (w/o cable):	12.35 oz./350 g
Power Requirements:	4.5 - 14 VDC
Stand-by Current:	50 mA
Power Sources:	Depending on host: • Host power • External power supply
Color:	Twilight Black/Yellow

Performance Characteristics

Scanner Type:	Retrocollective
Light Source:	650 nm visible laser diode
Scan Repetition:	36 scans per second typical
Min. Element Width:	5 mil/0.127 mm
Nominal Working Distance:	See Decode Zone
Print Contrast:	25% minimum reflective difference
Roll (Tilt): ¹	± 20° from normal
Pitch: ²	± 65° from normal
Skew (Yaw): ³	± 50° from normal
Decode Capability:	UPC/EAN, UPC/EAN with Supplementals, UCC/EAN 128, JAN 8 & 13, Code 39, Code 39 Full ASCII, Code 39 Trioptic, Code 128, Code 128 Full ASCII, Codabar (NW7), Interleaved 2 of 5, Discrete 2 of 5, Code 93, MSI, Code 11, Code 32, Bookland EAN, IATA, UCC/EAN RSS and RSS variants

Interfaces Supported:	RS232, Keyboard Wedge, Wand Emulation, Scanner Emulation, IBM 468X/469X, USB and Synapse
-----------------------	--

User Environment

Operating Temp.:	-22° to 122° F/-30° to 50° C
Storage Temp.:	-40° to 158° F/-40° to 70° C
Humidity:	5% to 95% relative humidity, non-condensing
Sealing:	Sealed to IP65 specifications
Drop Specifications:	Unit functions normally after repeated 6.5 ft./2 m drops to concrete

Ambient Light Immunity:	Immune to direct exposure of normal office and factory lighting conditions, as well as direct exposure to sunlight: Indoor: 450 ft. candles/4,842 LUX Outdoor: 8,000 ft. candles/86,080 LUX
Electrostatic Discharge:	Conforms to 20 kV air discharge and 8 kV of contact discharge

Regulatory


Input Transient Protection:	IEC 1000-4-(2,3,4,5,6,11)
EMI/RFI:	FCC Part 15 Class B, ICES-003 Class B, European Union EMC Directive, Japan VCCI/MITI/Dentori
Laser Safety:	IEC825-1 CLASS 2

Warranty

The Symbol LS3408FZ is warranted against defects in workmanship and materials for a period of 3 years (36 months) from date of shipment, provided that the product remains unmodified and is operated under normal and proper conditions. See full warranty for details.

- 1 - Roll (Tilt): Controlled by rotating the wrist clockwise or counterclockwise
- 2 - Pitch: Controlled by dropping or raising the wrist
- 3 - Skew (Yaw): Controlled by rotating the wrist from left to right or vice versa

Symbol LS3408FZ Decode Zone

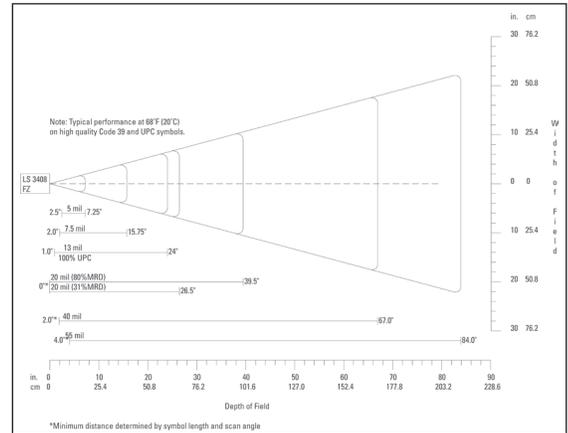

motorola.com

Part number SS-LS3408FZ. Printed in USA 05/07. MOTOROLA and the Stylized M Logo and Symbol and the Symbol Logo are registered in the US Patent & Trademark Office. All other product or service names are the property of their respective owners. ©2007 Motorola, Inc. All rights reserved. For system, product or services availability and specific information within your country, please contact your local Motorola office or Business Partner. Specifications are subject to change without notice.